

HD-TVI

Indoor Dome Camera

Version 06.15

HD-TVI

Indoor Dome Camera

KEY FEATURES

- 1080p HD-TVI
- Main Output: HD-TVI
- 2nd Output: Analog
- 2.8-12mm Vari-focal Lens
- Auto-focus Lens
- OSD Setup
- Day-Night w/IR
- D-WDR / 3DNR
- True WDR
- UTC
- DC12V
- Indoor / Ivory Housing




CAUTION : Any changes or modifications in construction of this device which are not expressly approved by the party


NOTE : This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

HD-TVI

Indoor Dome Camera

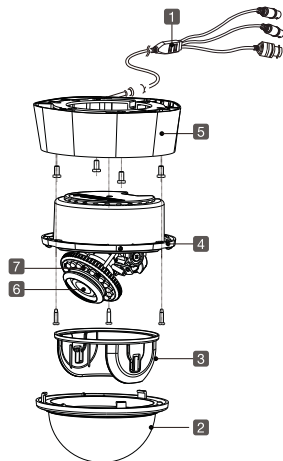

1 Power Input and Video Connectors




- 2 Bubble
- 3 Gimbal Bracket
- 4 Flush Mount
- 5 Surface Mount
- 6 Lens
- 7 IR LED

REMEMBER
For longer, more consistent performance, avoid installation locations prone to direct sunlight.

Before installing the camera, please make sure that all of the following items are included in the box.

INDOOR DOME CAMERA

1. Dome Camera
2. Installation Manual
3. Mounting Accessories



Mounting Accessories





Indoor Dome Camera

HD-TVI


Indoor Dome Camera

For the specific camera dimensions, please refer to the diagram below.

Unit: Inch (mm)

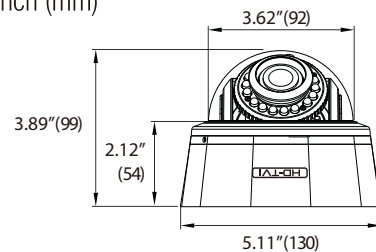

► OSD MENU ► Service Monitor Output



HD-TVI


Indoor Dome Camera

Imaging Sensor	1/3" CMOS
Total Pixels	1952(H) x 1266(V) = 2,471,232 (pixel)
Active pixels	1944(H) x 1213(V) = 2,358,072 (pixel)
Scanning system	Progressive Scan
Resolution	TVI : 1920x1080p(1080p/30fps) , 1280x720p(720p/60fps), Analog : 700TVL
Min. illumination	Color : 1.0 lux , BW : 0.5lux / Color DSS : 0.002 lux , BW DSS : 0.001 lux
S/N Ratio	More than 52dB (AGC off)
Video Output	TVI : 1920x1080p(1080p/30fps) , 1280x720p(720p/60fps) Analog : 1Vp-p Composite Output NTSC, PAL(w/o WDR)
LENS	DC(ALC)/Manual(ELC)
BRIGHTNESS	0~20
SHUTTER	AUTO / FLICKER / MANUAL(1/30(25)~1/6000)
SENS-UP	OFF/x2/x3/x4/x5/x6/x7/x8
AGC	0~20
DEFOG	ON/OFF
BACKLIGHT	OFF/HLC/BLC/WDR
DAY&NIGHT	AUTO/COLOR/B&W/EXT.
WHITE BAL.	AUTO/AUTOext/PRESET/MANUAL
DNR	OFF/LOW/MIDDLE/HIGH
SHARPNESS	0~10
MIRROR	ON/OFF
FLIP	ON/OFF
WDR	ON/OFF
SHADING	ON/OFF
PRIVACY	ON(16 Points)/OFF
MOTION	ON/OFF
OUTPUT MODE	720P / 720P CROP / 1080P
FRAME RATE	1080P-25FPS / 30FPS, 720P CROP-50FPS / 60FPS
CVBS	NTSC/PAL
LANGUAGE	ENG/CHN/JPN (MULTI LANGUAGE)
COM	ID (0 ~ 255), BAUDRATE (2400 / 4800 / 9600 / 57600/115200), PROTOCOL (PELCO-P / PELCO-D)
Operating Temperature	-10℃ ~ +50℃ (Humidity : 0%RH ~ 80%RH)
Storage Temperature	-20℃ ~ +60℃ (Humidity : 0%RH ~ 90%RH)
Lens	2.8-12mm Auto-Focus Lens
Input Voltage	DC 12V
IR LEDs	17
IR LEDs Distance	50ft

HD-TVI


Indoor Dome Camera

You may select the OSD menu items to adjust by using OSD buttons for your desire.
To use OSD menu, press SET button and SET UP will appear as shown on the screen.




Move the arrow to select functions by use
UP/Down & LEFT/RIGHT buttons.

AE




AE ; BRIGHTNESS



- 1) BRIGHTNESS - 400 -
-> 256 ~ 1024
- 2) AE MODE - NORMAL -
-> BACK LIGHT / FRONT LIGHT / NORMAL
- 3) RETURN

WB



- 1) WB - AUTO -
-> AUTO / GRAY WORLD


3

4

HD-TVI


Indoor Dome Camera

DAY/NIGHT




- 1) DAY / NIGHT - EXTURN -
-> COLOR / MONO / INTERNAL / EXTURN

VIDEO SETTING




VIDEO SETTING ; VIDEO STANDARD




- 1) VIDEO STANDARD - NTSC -
-> NTSC / PAL

VIDEO SETTING ; NR



- 1) 2D- NR - OPEN -
-> OPEN / CLOSE
- 2) Y - NR -OPEN -
-> OPEN / CLOSE
- 3) C- NR -OPEN-
-> OPEN / CLOSE

VIDEO SETTING ; SHARPNESS




- 1) DETAIL SP - 2 -
-> 0 ~ 15
- 2) DETAIL SP - 5 -
-> 0 ~ 15

HD-TVI


Indoor Dome Camera

VIDEO SETTING ; SATURATION



- 1) SATURATION - 104 -
-> 0 ~ 504

LANGUAGE



- 1) LANGUAGE
-> ENGLISH / CHINESES

RESET

SAVE_EXIT

EXIT

5

6